


TX700 HMI/PLC Series

Dual-Core IOT Gateway — CODESYS V3 PLC with WEB VISU

Large Housing, 3 × RJ45 Ethernet

TX700D-P3WV01

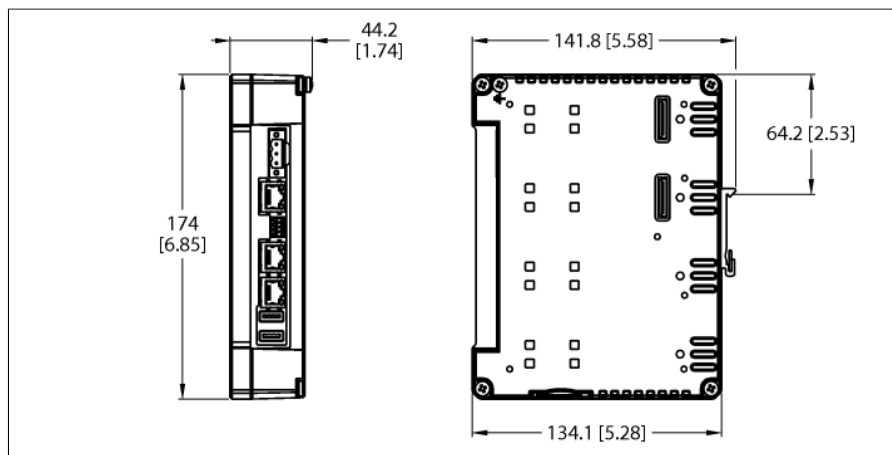

- 3 RJ45 Ethernet ports with 10/100 Mbit
- 1 serial interface (RS232, RS485, RS422)
- 2 USB host ports
- 1 SD card slot

Type	TX700D-P3WV01
ID	100009354

Controller	
Processor	ARM Cortex A9, Dual core 800 MHz
Memory	4 GB Flash
RAM memory	1024 MB
Add-on memory	1x SD card slot, 2 USB host ports
Real time clock	yes (battery-backed)

PLC data	
Programming	CODESYS V3
Released for CODESYS version	V 3.5.12.10
Programming languages	IEC 61131-3 (IL, LD, FBD, SFC, ST)
Programming interface	Ethernet
Program memory	20000 kByte
Non-volatile memory	63 kByte

Interfaces	
Onboard	3 × RJ45 Ethernet, 1 × RS232/485/422, 2 × USB host, 1 × power supply, 2 × expansion slot
Onboard for selection	CANopen Master (via extension module)
Ethernet	ETH0 - 10/100/1000 Mbit ETH1 - 10/100 Mbit ETH2 - 10/100 Mbit
Protocols	PROFINET (Controller/Device) EtherNet/IP (Scanner/Adapter) Modbus TCP (Server/Client) EtherCAT (MainDevice)
Fieldbus	Modbus RTU (Server/Client) CANopen (Server)
USB	2 × host ports
Serial	RS232 / RS485 / RS422
Expansion slot	Two slots for up to four plug-in modules

Power supply	
Rated value	24 VDC, max. 0.5 A
Admissible voltage range	10...32 VDC

General data	
Operating ambient conditions	-20...60 °C, 5...85 % relative humidity, non-condensing
Storage ambient conditions	-30...70 °C, 5...85 % relative humidity, non-condensing
Approvals	CE cULus
Ex approval	ATEX IEC Ex Haz. Loc. Class I, Division 2, Groups A, B, C and D
Protection class	IP20

Dimensions	
Front (W x H x D)	44 x 174 x 144 mm
Weight	approx. 0.65 kg

Connection and pin assignment

	Power Supply The power supply connector is delivered with each device.	Pin Assignment  <table><tr><td>1</td><td>1 = 24 VDC</td></tr><tr><td>2</td><td>2 = 0 V</td></tr><tr><td>3</td><td>3 = $\frac{1}{2}$</td></tr></table>	1	1 = 24 VDC	2	2 = 0 V	3	3 = $\frac{1}{2}$		
1	1 = 24 VDC									
2	2 = 0 V									
3	3 = $\frac{1}{2}$									
	USB Interface	Pin Assignment  <table><tr><td>1</td><td>1 = 5 VDC</td></tr><tr><td>2</td><td>2 = D -</td></tr><tr><td>3</td><td>3 = D +</td></tr><tr><td>4</td><td>4 = GND</td></tr></table>	1	1 = 5 VDC	2	2 = D -	3	3 = D +	4	4 = GND
1	1 = 5 VDC									
2	2 = D -									
3	3 = D +									
4	4 = GND									
	Ethernet Ethernet ports ETH1 and ETH2 (10/100 Mbit) The Ethernet ports are independent but can be bridged with ETH0. Ethernet cables (examples): RJ45 male connector – RJ45 male connector: RJ45S-RJ45S-4414-2M (order number: 6441423) RJ45 male connector – M12 male connector, 4-pin, D-coded: RSSD-RJ45S-4414-2M (order number: 6441413) RJ45 male connector – M8 male connector, 4-pin: PSGS4M-RJ45S-4414-2M (order number: 6933005) RJ45 male connector — M12 female receptacle, 4-pin, D-coded: RJ45-FKSDD-4414-2M (order number: 6935282)	Pin Assignment  <table><tr><td>1 = TX +</td></tr><tr><td>2 = TX -</td></tr><tr><td>3 = RX +</td></tr><tr><td>4 = n.c.</td></tr><tr><td>5 = n.c.</td></tr><tr><td>6 = RX -</td></tr><tr><td>7 = n.c.</td></tr><tr><td>8 = n.c.</td></tr></table>	1 = TX +	2 = TX -	3 = RX +	4 = n.c.	5 = n.c.	6 = RX -	7 = n.c.	8 = n.c.
1 = TX +										
2 = TX -										
3 = RX +										
4 = n.c.										
5 = n.c.										
6 = RX -										
7 = n.c.										
8 = n.c.										
	Ethernet Ethernet port ETH0 (10/100 Mbit)	Pin Assignment  <table><tr><td>1 = TX +</td></tr><tr><td>2 = TX -</td></tr><tr><td>3 = RX +</td></tr><tr><td>4 = n.c.</td></tr><tr><td>5 = n.c.</td></tr><tr><td>6 = RX -</td></tr><tr><td>7 = n.c.</td></tr><tr><td>8 = n.c.</td></tr></table>	1 = TX +	2 = TX -	3 = RX +	4 = n.c.	5 = n.c.	6 = RX -	7 = n.c.	8 = n.c.
1 = TX +										
2 = TX -										
3 = RX +										
4 = n.c.										
5 = n.c.										
6 = RX -										
7 = n.c.										
8 = n.c.										



Serial Interface

The serial interface can be operated either as RS232, RS485 or RS422. The adjacent wiring diagrams show the respective pin assignments.

PLEASE NOTE: In RS485 mode, pins 1 and 2 as well as 3 and 4 must be externally connected!

Pin Assignment in RS232 Operating Mode



- 1 = RX
- 2 = TX
- 3 = CTS
- 4 = RTS
- 5 = +5 VDC output
- 6 = GND
- 7 = n.c.
- 8 = shield

Pin Assignment in RS485 Operating Mode




- 1 = B- (RX-)
- 2 = A- (TX-)
- 3 = B+ (RX+)
- 4 = A+ (TX+)
- 5 = +5 VDC output
- 6 = GND
- 7 = n.c.
- 8 = shield

Pin Assignment in RS422 Operating Mode



- 1 = RX-
- 2 = TX-
- 3 = RX+
- 4 = TX+
- 5 = +5 VDC output
- 6 = GND
- 7 = n.c.
- 8 = shield



Ports for Plug-in Modules



SD Card Slot

SD card (example): SD CARD 2 GB (order number: 6828025)

Accessories

Type code	Ident no.		Dimension drawing
TX-LTE-WLAN	100025179	Plug-in LTE and Wi-Fi modem with LTE/UMTS/GSM, Wi-Fi and GNSS	

Function accessories

Type code	Ident no.		Dimension drawing
TX-IO-XX03	6828201	Plug-in I/O module — 20 DI, 12 DO, 4 AI (U/I/RTD/TC), 4 AO (U/I)	
TX-IO-DX06	6828203	Plug-in I/O module — 8 DI, 6 DO, 1 relay output (NO)	
TX-DP-S	100010167	Plug-in PROFIBUS DP slave interface, 9-pin SUB-D female connector	
TX-CAN	6828210	Plug-in CANopen interface, 9-pin SUB-D male connector	
TX-RS485	100002598	Plug-in interface for RS485/RS422, 9-pin SUB-D female connector	
TX-RS232	100002599	Plug-in interface for RS232, 9-pin SUB-D female connector	
TX-PSC	100002938	Power Supply Male Connector for TX HMI Devices	